




RS INDUSTRIAL SOLUTIONS

Sales, Service & Manufacturing



Stretch Wrapping Machines



PALLET WRAPPING MACHINE

Specifications

Maximum wrapping speed	15-25 loads/hour
Max Wrapping Height & Weight	2400mm / 2000KG
Turntable Speed	0-13RPM(Adjustable)
Turntable Size	1650mm
Turntable Drive	0.75PH Chain Drive
Cut Film	Automatic
Machine Size	L:2800mm W:1800mm H:2650mm
Machine Weight	800KG
Standard Pre-Stretch	300% pre-stretch
Film Capacity	250mm Diameter
Standard Film Width	500mm
Film Delivery System	Power Pre -Stretch



CARTON BOX WRAPPING MACHINE (With Vertical Movement Device)

Specifications

Control	Delta PLC 0-3 top(bottom) & up-down Wrap times choose Cycle Pause capability
Film carriage drive	Film carriage can up-down to suit difference height product; Heavy duty chain lift, calm and safety
Film carriage*	Power prestretch 300%
Height Sensing	Adjustable Sansor block to active top limiting switch
Rotating Platform Speed	3-25 RPM adjustable by frequency charger
Top Plate	Pneumatic top plate
Packing Box Size	300-800mm(L) x 300-800mm (W) x 300-800mm (H)
Max. Weight Capacity	100 Kg
Power Supply	220V/50HZ/1Phase 1.0Kw
Machine Weight	220 kG
Machine Dimension	1740mm x 600mm x 1800mm

*Film Delivery variable speed by seprate DC Drive Motor. Film dancer-bar with variable speed output **Special packing height available



SEMI CARTON BOX WRAPPING MACHINE

Specifications

Turn Table Dia	600 X 600 mm
TT Speed	5-25-RPM
Packing Box Size	L-300X800, W-300x800, H-300x500
Power Pre Stretch Unit	0-300%
Max. Package Size	500mm X500mm X 500mm
Weight Capacity	80 Kgs (Max)
Power Supply	220V 50HZ



MANUAL CARTON BOX WRAPPING MACHINE

Specifications

Turn Table Dia	600 X 600 mm
TT Speed	Fixed
Packing Box Size	L-300X1000, W-300x1000, H-300x1000
Power Pre Stretch Unit	N.A.
Max. Package Size	500mm X 500mm X 500mm
Weight Capacity	50 Kgs (Max)
Power Supply	350 W-220vAL 50HZ



SHRINK MACHINES

SHRINK TUNNELS

Specifications



Model	3020A	4525A	4535LA
Machine Dim.	1200x500x1050	1200x650x1100	1600x650x1200
Tunnel Dimension	900x300x50~200	900x450x50~250	1200x450x50~350
Conveyor Loading	10	10	30
Conveyor Speed (M/min)	0~10	0~10	0~10
Power supply	1Ø, 220V, 50Hz	3Ø, 380V, 50Hz	3Ø, 380V, 50Hz
Power (kw)	5.0	6.5	9.6
Net Weight (Kg)	60	90	120
Applicable Film	POF/PVC	POF/PVC	POF/PVC/PE

HEAVY DUTY SHRINK TUNNEL FOR FROZEN MEAT BOXES MS STRUCTURE - SS COVERING

Specifications



Chamber Opening	750x300mm
Infeed Conveyor	600mm
Outfeed Conveyor	1050mm
Chamber Length	1150mm
Conveyor Width	600mm
Power	3Ø440V, 20kwh

WEB SEALER & SHRINK TUNNEL

Specifications

Model	ST 6030	SM 6040 S/SM
Machine Dim.	1129x1305x1991	2400x900x1690
Tunnel Dimension	-	1500x600x400
Max Packaging size	500x300x300	1300x400x300
Sealing size	700	-
Temperature (°C)	0-200	0-300
Packing Speed (pcs/M)	5-8	15-20
Net Weight (Kg)	300	500/550
Power (kw)	1	20
Power supply	3Ø, 380V 50Hz	3Ø, 380V 50Hz
Air Pressure (kg/cm ²)	6-8	-
Applicable Film	PE	PE



L-SEALER

Specifications



MANUAL L-SEALER



SEMI AUTO L-SEALER

Type	Semi Automatic	Manual
Machine Dim.	1569x710x1060	1400x650x900
Max packaging size L+H(mm) H<200	≤500	≤500
W+H(mm) h<200	≤400	≤400
Max sealing size(mm)	550x450	550x350
Packing Speed (pcs/h)	800-1000	400-500
Net Weight (Kg)	125	100
Power (kw)	1.2	1
Power supply	220 V (I kw)	220 V (I kw)

Specifications

AUTOMATIC L SEALERS & TUNNELS

Model	FL 5545 TBA/TBB	FL 6560 TBA/TBB	SM 4525
Machine Dim.	1685x828x1480	1940x1000x1480	1300x700x1465
Packaging size -			
L+H(mm) H<130	≤500	≤600	700x350x200
W+H(mm) h<130	≤430	≤570	700x350x200
Max sealing size(mm)	550x450	650x600	
Packing Speed (pcs/M)	15-25	15-25	0-15M
Net Weight (Kg)	225	300	260
Power (kw)	2.5	3	9
Power supply	1Ø, 220V 50Hz	1Ø, 220V 50Hz	3Ø, 380V 50Hz
Applicable Film	POF	POF	POF



STRAPPING MACHINES

SEMI AUTOMATIC STRAPPING MACHINES



Specifications

Strap Cycle Speed 1.5 sec./ strap (30 - 40 Straps/min.)
Tension Strength 15~60Kg
Table Height 750mm (001SH) & 380 mm (002LTH)
Strap Width 5~15mm (Adjustable)
Sealing Method Heat Sealed
Minimum Strapping Size 60 mm (W) x 30 mm (H)
Maximum Strapping Size
Driving Motor 1 Ø 220V 200W
Power Supply 1 Ø 220V 50 Hz 350 W
Dimensions (mm) 900(W) x 580(D) x 750(H)
Machine Weight 100Kg

FULLY AUTOMATIC STRAPPING MACHINE (S.T.A)

Specifications

Arch Size	850W x 400/600H mm (Standard)
Power Supply	3Ø, 380V, 50 Hz, 1250 watts
Strap Cycle Speed	27 Cycles per Min
Tension Strength	Max. 70 Kgs. (Adjustable-Mechanically)
Strap Width	9/12/15 mm - to be specified at the time of placing the order
Sealing Method	Heat Sealing
Dimension	1400W x 640D x 1475H mm
Table Height	805 mm
Machine Weight	220 Kgs.
Gross Weight	265 Kgs.
Control	PLC Controlled



FULLY AUTOMATIC STRAPPING MACHINE (ONLINE)

Specifications

Arch Size	850W x 600H mm (Standard)
Power Supply	110/220V 50/60Hz 1Ph; 220/380V 50/60Hz 3Ph
Strap Cycle Speed	2.5 Sec./Cycle
Tension Strength	Max. 70 Kgs.
Strap Width	9~15.5mm
Sealing Method	Heat Sealing
Dimension	1550W x 640D x 1550H mm
Table Height	820 mm
Package Size	200~520W, 30~560H mm
Machine Weight	307 Kgs.
Gross Weight	402 Kgs.
Power Belt Speed	17M/50Hz Per Min.



CARTON SEALING MACHINES

Specifications

Conveying Belt Speed	20 mtrs. / min.
Min. Carton Size	140mm(W)x150mm(H)xNo bar (L)
Max. Carton Size	500mm(W)x600mm(H)xNo bar (L)
Power Supply	1 Phase 220V 50Hz 200W
Working Height	635mm~780mm (Adjustable)
Width of Adhesive Tape	48 / 60 / 72
Machine Dimension(mm)	1755(L)x740(W)x(1445~1605)(H)
Weight	120 kgs.
Options	Infeed / Outfeed Conveyor Carton Counting & Auto On/Off



CS-040MA-Regular Model



**CS-040MA- HEAVY DUTY MODEL
SELF ADJUSTMENT**

Specifications

Model	CS 040SA - Self Adjustment (Pneumatic)
Function	Top & Side Drive
Power Supply	1Ø, 220V/230V/240V 3Ø, 380V/415V/440V, 50/60 Hz
Tape Width	2" or 3" (according to customer need)
2" Tape carton dim.	L-150~∞mm, W=130~500mm, H=110~500mm
3" Tape carton dim.	L-150~∞mm, W=155~500mm, H=110~500mm
Working table height	570~770mm
Belt Speed	20M / min
Machine Size	1250 x 910 x 1315 mm (LxWxH)
Compressed Air	6 KG/cm ²

VACUUM PACKAGING MACHINES

Single Chamber Vacuum Packaging Machines

Specifications



Model	DZ(Q)-4002E	DZ(Q)-500/2E	DZ(Q)-600/2E
Voltage	110-220V/50-60 Hz	220-380V/50-60 Hz	
Power of pump	0.75 KW	0.75 KW	1.5 KW
Heat-Sealing Power	0.5 KW	0.6 KW	0.7 KW
Lowest absolute Pressure	1.33 kpa		
Volume of Vacuum Case	440 x 420 x 130mm	520 x 500 x 130mm	650 x 595 x 150mm
Sealing Strip Size	400 x 10mm	500 x 10 mm	Single 600 x 10mm Double 570 x 10mm
Number of heater	1 or 2 pcs		
Exhaustment of vacuum pump	20m ³ /h		40m ³ /h
Material of Vacuum Case and hull	Stainless steel		
Dimension	540 x 490 x 880mm	610 x 520 x 920mm	730 x 710 x 960mm
Weight	120 Kg	140 Kg	160 Kg

Bigger sizes i.e 800/900/1000 are available on demand, please contact us for details and specifications

Double Chamber Vacuum Packaging Machines

Specifications

Model	DZ(Q)-400/2SB	DZ(Q)-500/2SB	DZ(Q)-600/2SB
Voltage		3 Phase 415V / 50Hz	
Power of pump	0.75 KW	1.5 KW	2.25 KW
Heat-Sealing Power	0.6 KW	0.75 KW	1 KW
Lowest absolute Pressure	1.33 kpa		
Volume of Vacuum Case	550 x 450 x 115mm	560 x 540 x 150mm	610 x 540 x 150mm
Sealing Strip Size	400 x 10 mm	500 x 10mm	600 x 10mm
Number of heater	2 each chamber		
Exhaustment of vacuum pump	20m ³ /h	2 x 20m ³ /h	3 x 20m ³ /h
Material of Vacuum Case and hull	Stainless steel		
Dimension	1200 x 520 x 850mm	1260 x 610 x 850mm	1450 x 610 x 860mm
Weight	180 Kg	220 Kg	250 Kg


Bigger sizes i.e 700/800 are available on demand, please contact us for details and specifications



CONTINUOUS SEALING MACHINES



VERTICAL BAND SEALING MACHINE

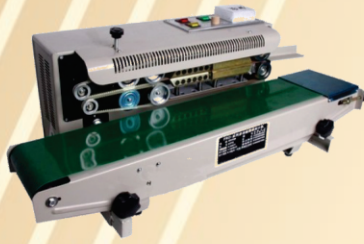

HORIZONTAL BAND SEALING MACHINE

Specifications

Model	RS 900 L
Voltage (V/Hz)	220/50
Power (W)	650
Sealing Speed (m/min)	0~12(0~16)
Sealing Width (mm)	8 ~ 10
Temperature range (Deg.C)	0 ~ 300
Distance from the sealing center to the conveying table (mm)	10 ~ 40
Conveyor size (L x W)mm	840x153
Film Thickness (mm)	0.08
Single Conveyor Loading (Kg)	1
Overall Conveyor Loading (Kg)	3
Overall Dimension (LxWxH)mm	840x380x320
Net Weight (Kg)	32

OUR OTHER PRODUCTS



PVC BELT CONVEYOR



TRUCK LOADER CONVEYOR



INKJET PRINTER CONVEYOR



GRAVITY ROLLER CONVEYOR



POWERISED ROLLER CONVEYOR



FLEXIBLE ROLLER CONVEYOR



INCLINED CONVEYOR



WIRE MESH CHAIN CONVEYOR



MODULAR SLAT CONVEYOR



PACKING BELT CONVEYOR



ULTRASONIC SPONGE SCRUBBER MAKING MACHINE



NON WOVEN ROLL TO SHEET CUTTING MACHINE



AUTOMATIC SIDE SEALING BAG MAKING MACHINE



BOTTOM SEALING & CUTTING BAG MAKING MACHINE



ZIP LOCK BAG MAKING MACHINE



SINGLE LOOP HANDLE MACHINE



AC DRIVE



SPARE PARTS FOR PACKAGING MACHINES



SHRINK & STRETCH FILM ROLLS



PP BOX STRAPPING ROLLS



RS INDUSTRIAL SOLUTIONS

Office : R-141, Mohan Garden, Uttam Nagar, New Delhi-110059

Factory : Bawana Industrial Area

Ph.: 011-4512644, +91 9582878796, 9818258113

E-mail:rsindustrialsolution@gmail.com,sales@rsindustrialsolution.in | www.rsindustrialsolutions.in